

ASSEMBLY INSTRUCTIONS

Menil 24" Linear Sconce

Item # MF2172

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver

Slotted Screwdriver

Hammer

Pencil

Drill

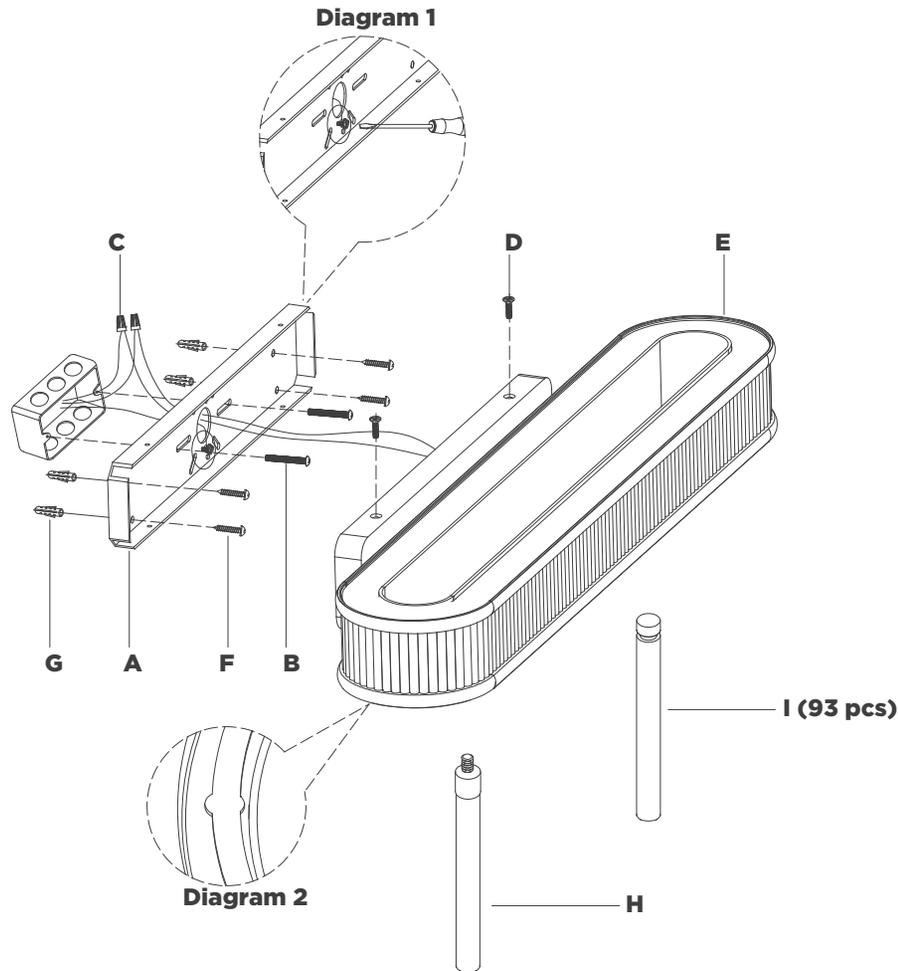

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(A)** from fixture **(E)** by removing screws **(D)**.
3. Using mounting plate **(A)** as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors **(G)** into the holes using a hammer.
5. Install mounting plate **(A)** to the junction box and secure with mounting screws **(B)**, then secure wood screws **(F)** to anchors **(G)**.
6. Wrap supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.
7. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(C)**.
8. Connect fixture input hot wire (black) to the supply hot wire (usually black) using wire nut **(C)**.

NOTE: It is imperative that the fixture is grounded.

CAUTION: Do not reverse the hot and neutral connections.


ASSEMBLY INSTRUCTIONS

Menil 24" Linear Sconce

Item # MF2172

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

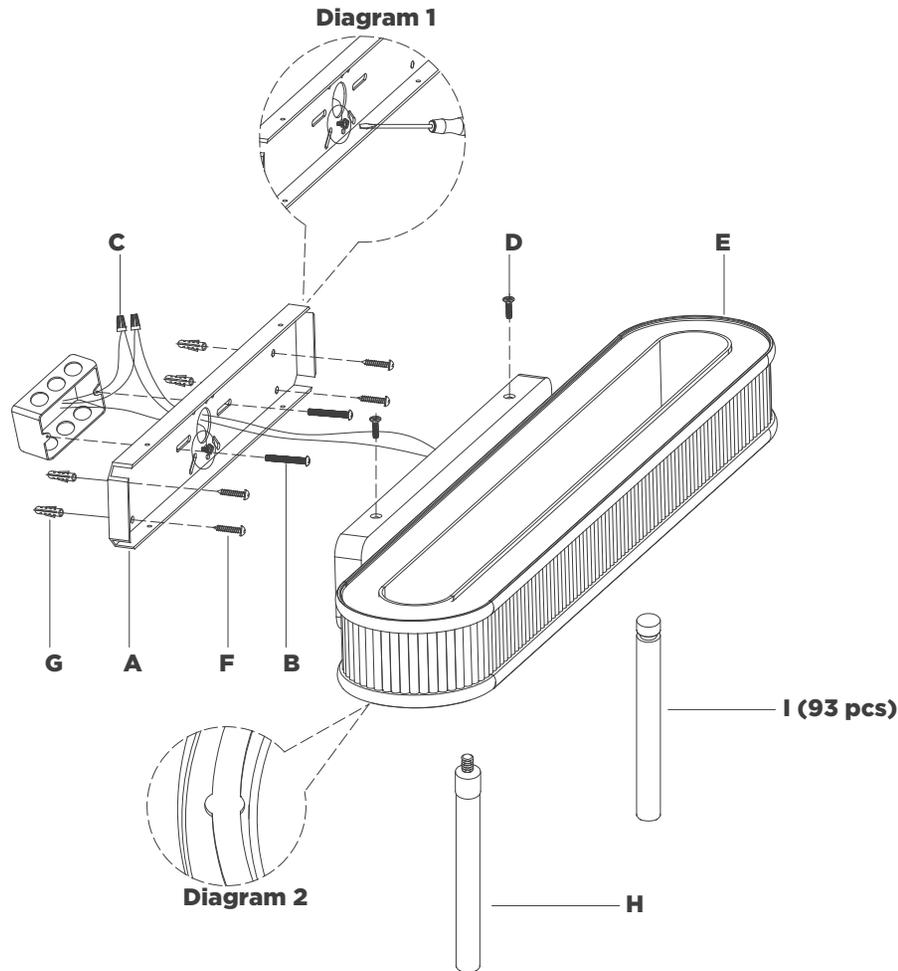

9. Make sure all wire connections are tight, then carefully tuck into the junction box.
10. Install fixture (E) to mounting plate (A) and secure with screws (D).
11. To install glass rods (I) insert into hole on bottom of fixture, align with groove in rod and slide over.
12. Once all glass rods (I) are installed, align glass rod (H) with hole on bottom of fixture frame and thread to secure (see diagram 2).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.