

Helios Semi-Flush Mount**AF1083 1.0****VISUAL COMFORT & CO.****STUDIO COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information. This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

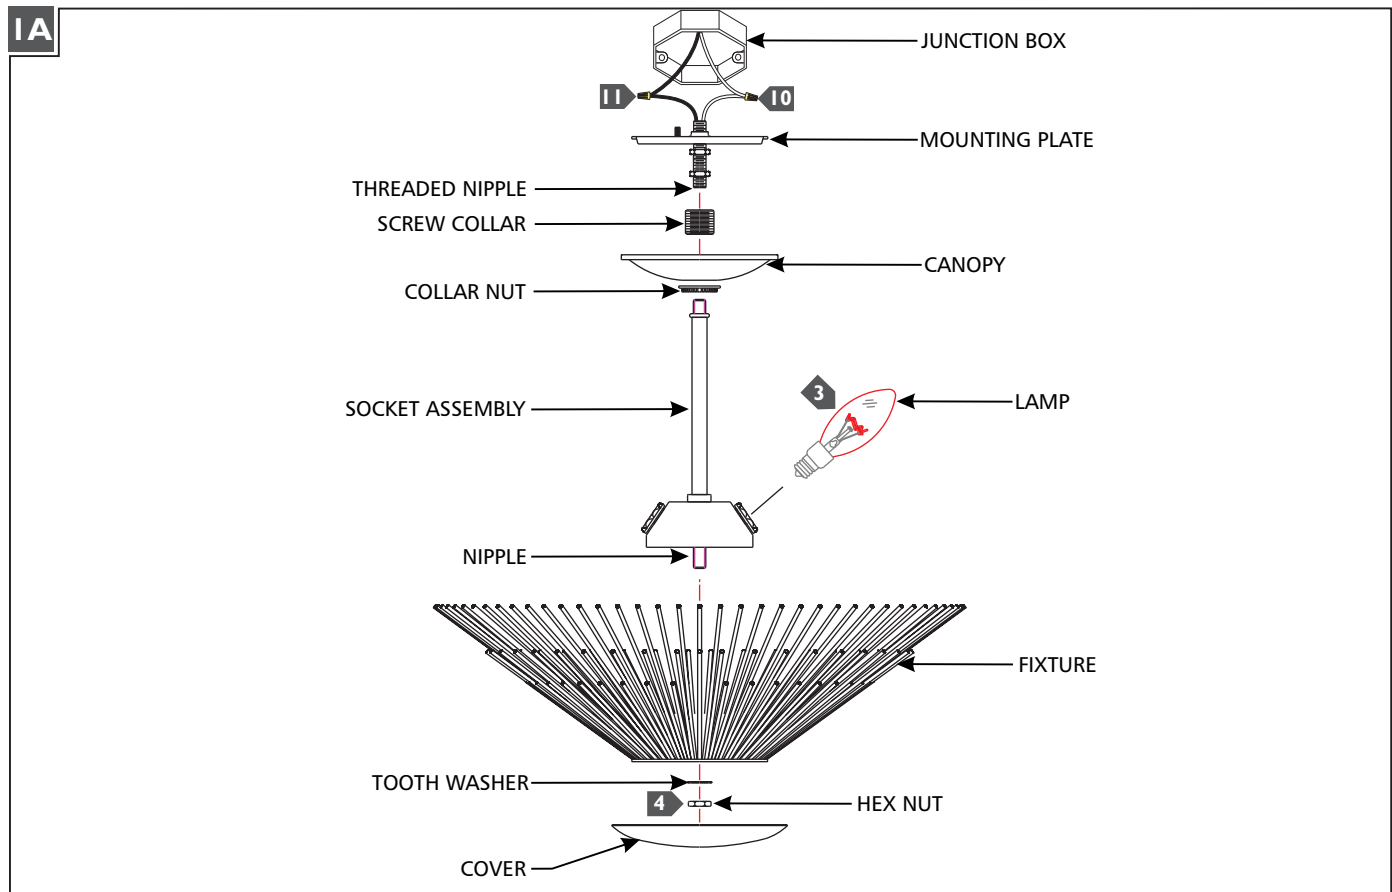

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2** Fasten the screw collar into the bottom end of the threaded nipple and lock into position by tightening the hex nut.
- 3** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information
- 4** Place the fixture onto the bottom of the socket assembly, then place the tooth washer onto the nipple and secure it in place using the hex nut.
- 5** Screw the cover onto the bottom of the socket assembly nipple.
- 6** Feed the fixture wires through the collar nut and canopy, then slide them down the socket assembly pipe.
- 7** Feed the fixture wires through the screw collar assembly, then screw it onto the pipe.
- 8** Pull the fixture and power line wires out of the junction box, then secure the mounting plate to the junction box.
- 9** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 10** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 11** Connect the black fixture wire to the hot power line wire with a wire nut.
- 12** Neatly place all the wires into the junction box, place the canopy onto the threaded nipple, and secure it in place by screwing the collar nut onto the screw collar.

SAVE THESE INSTRUCTIONS!