

Stonington Large Pendant

CC1104, CC1114 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

IA

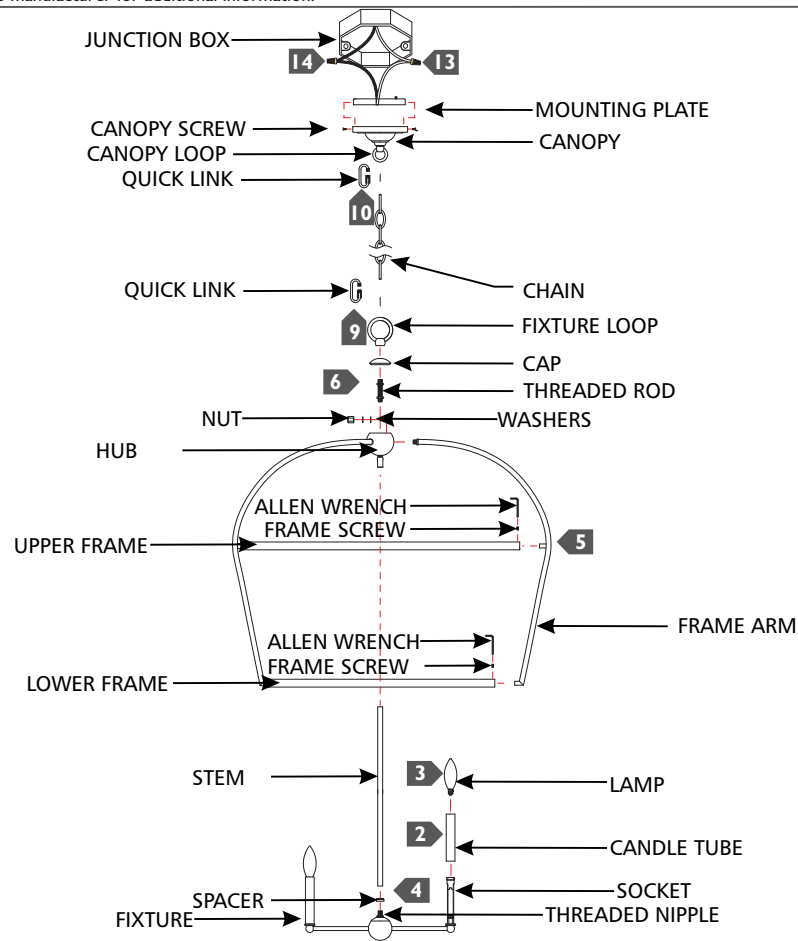

- 1 Secure the mounting plate to the junction box.
- 2 Install the candle tube by sliding it over the socket.
- 3 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 4 Feed the cord through the spacer and stem and secure the stem to the fixture by screwing it on the threaded nipple.
- 5 Assemble the frame:
 - A.) Insert a frame arm into the hub and secure with two washers and a nut.
 - B.) Attach the lower frame with a frame screw and allen wrench.
 - C.) Attach the upper frame with a frame screw and allen wrench.
 - D.) Repeat steps A-C for the remaining four arms.
- 6 Feed the cord through the hub, threaded rod, cap and fixture loop, then screw the stem into the bottom of the hub.
- 7 screw the threaded rod into the hub then place the cap over the threaded nipple and secure by screwing the fixture loop onto threaded nipple.
- 8 Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 9 Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 10 Install the other quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 11 Weave the cord through the chain, canopy and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 12 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 13 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 14 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 15 Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by using the provided canopy screws.

SAVE THESE INSTRUCTIONS!