

Geneva Linear Chandelier

CC13810 1.0

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

SAVE THESE INSTRUCTIONS!

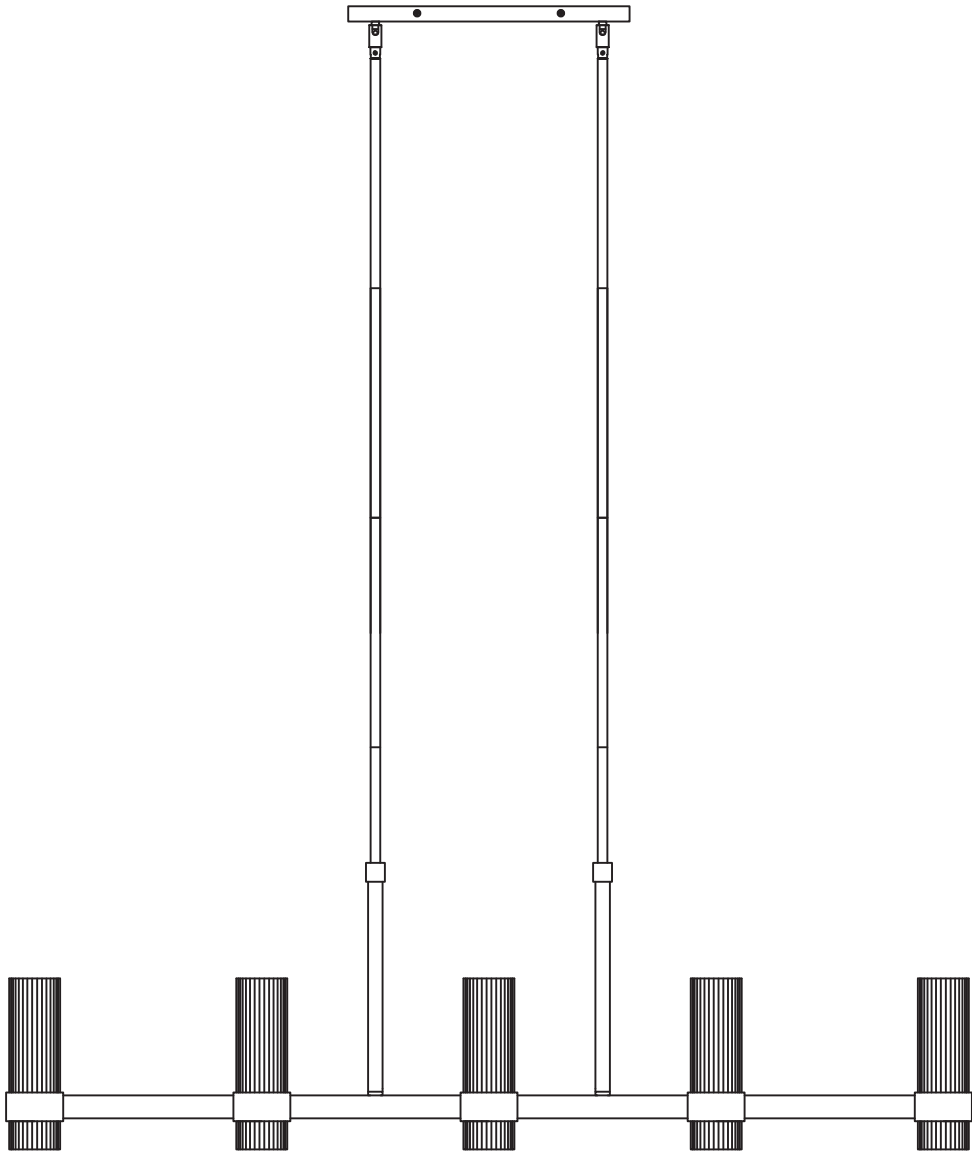

# Install the Fixture

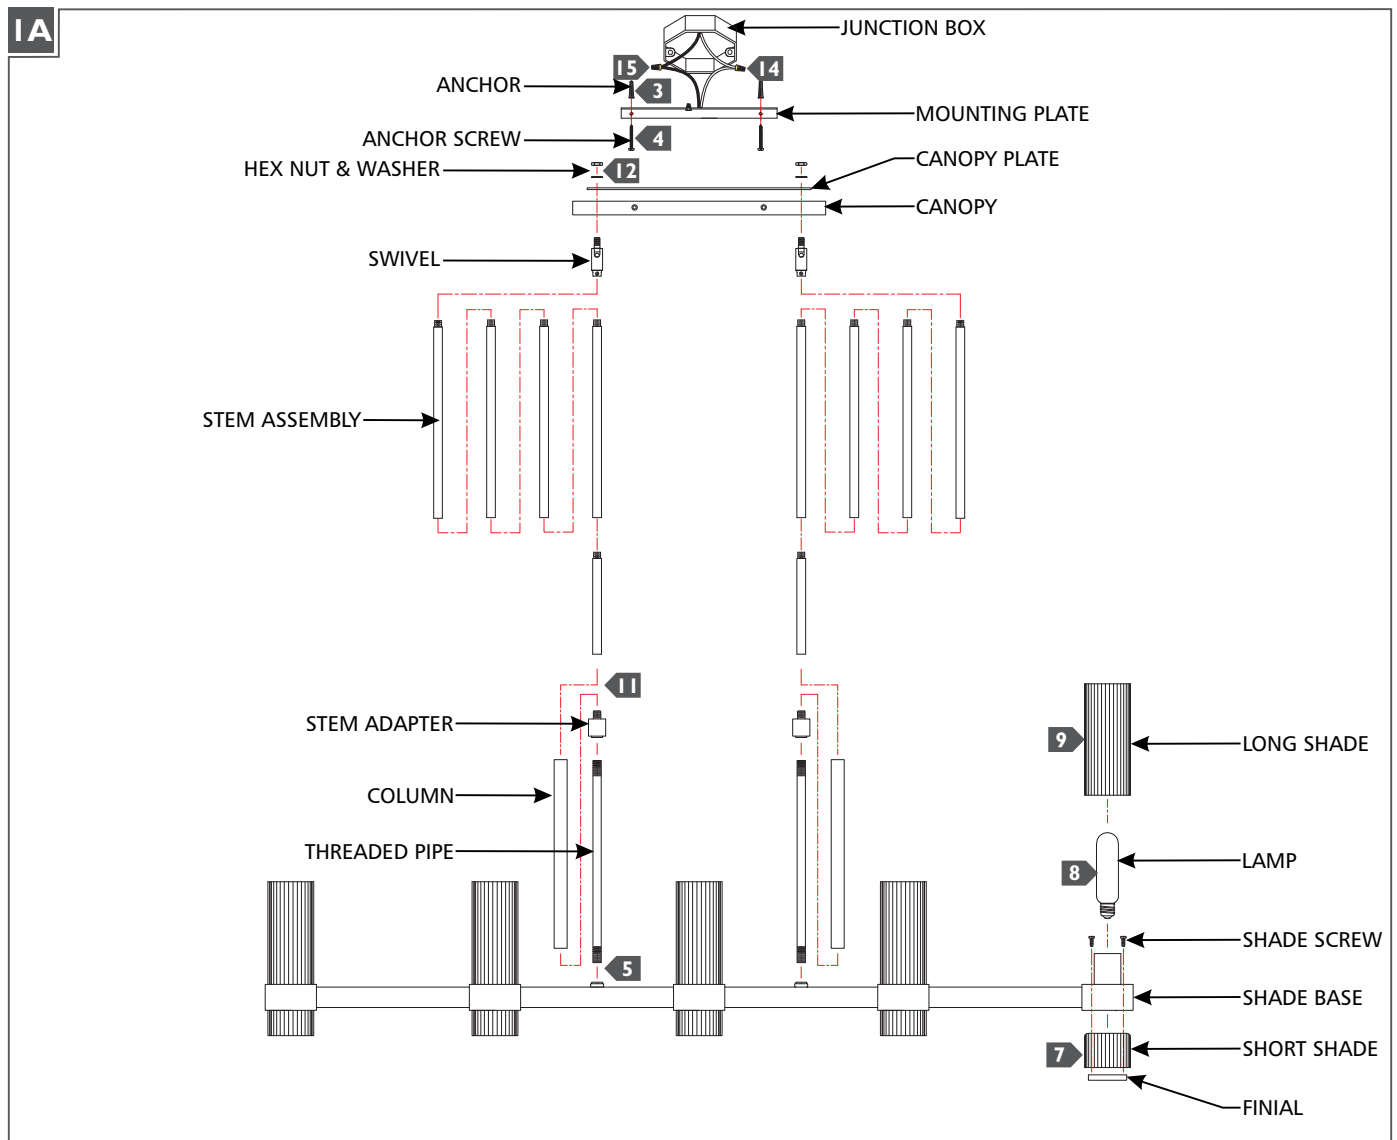

- 1** Temporarily install the mounting plate onto the junction box.
- 2** Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3** Drill appropriate sized holes at the marked locations and install the anchors.
- 4** Secure the mounting plate to the junction box and screw the anchors screws into the anchors.
- 5** Feed the fixture wires through the threaded pipe, then screw it onto the fixture.
- 6** Feed the fixtures wire through the column and stem adapter, then slide the column onto the threaded pipe and screw the stem adapter onto the pipe to secure in place. Repeat steps 5 and 6 for other side.
- 7** Install the short shade to the bottom of the shade base followed by the finial, then secure in place using the shade screws. Repeat for remaining short shades.
- 8** Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- 9** Install the long shade by placing it over the lamp and into the shade base. Repeat for remaining long shades.
- 10** Determine the wanted height of the fixture with the provided stems and swivels, then assemble them by screwing them together.
- 11** Feed the fixture wires through the stem assembly, then screw the stem assemblies onto the stem adapters.
- 12** Feed the cord through the canopy and plate, then secure them onto the swivels using provided washers and hex nuts.
- 13** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 14** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 15** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 16** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the canopy screws.