


ASSEMBLY INSTRUCTIONS

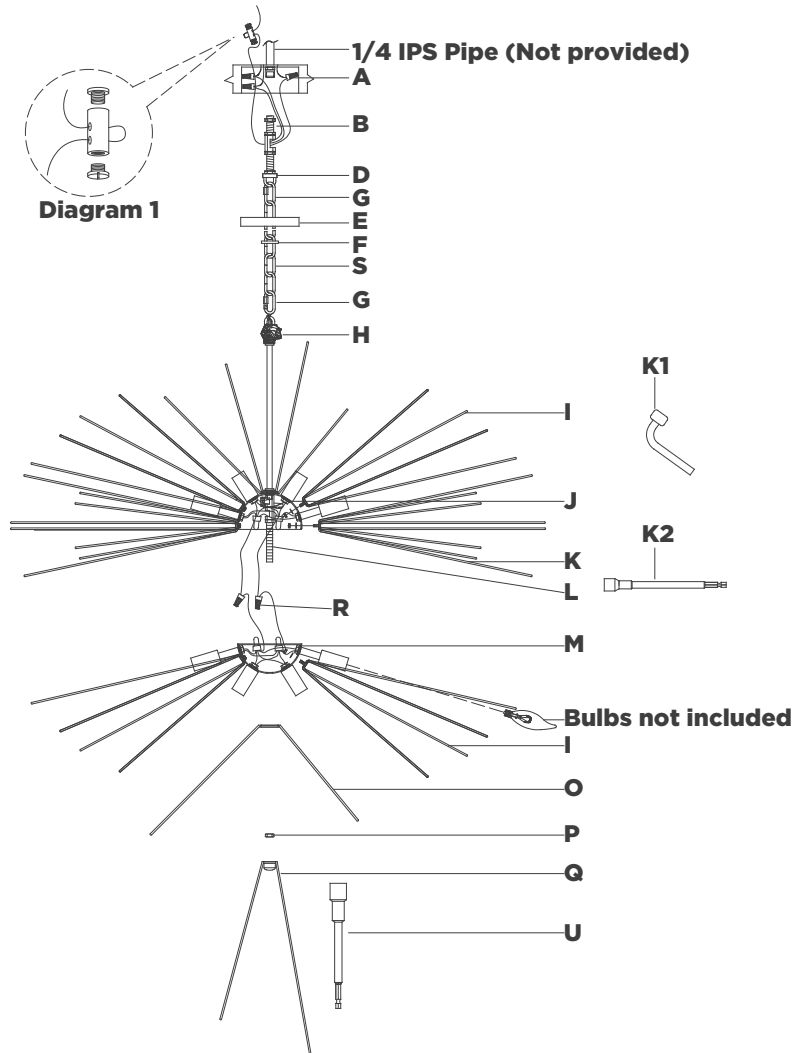

Strada Large Round Pendant

Item # KW5072

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Strippers
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Cutters		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install threaded nipple (**B**) into receiver and tighten with wrench.
NOTE: Item must be supported independent of the junction box due to hanging weight.
3. Remove lock collar (**D**) from chain (**S**) and secure to threaded receiver attached to structural member by tightening locknut.
4. Install canopy (**E**) to collar loop (**D**) and secure with collar ring (**F**).
5. Attach branch (**I**) to the top half ball (**J**) and secure with hex nut using provided wrench (**K2**).
6. Attach branch (**K**) to the top half ball (**J**) and secure with hex nut using provided wrench (**K1**).
NOTE: It is important to let all branch (**K**) assembled and even distribution, then tighten it by wrench.
7. Attach branch (**I**) to the bottom half ball (**M**) and secure with the hex nut using provided wrench (**K2**).

ASSEMBLY INSTRUCTIONS

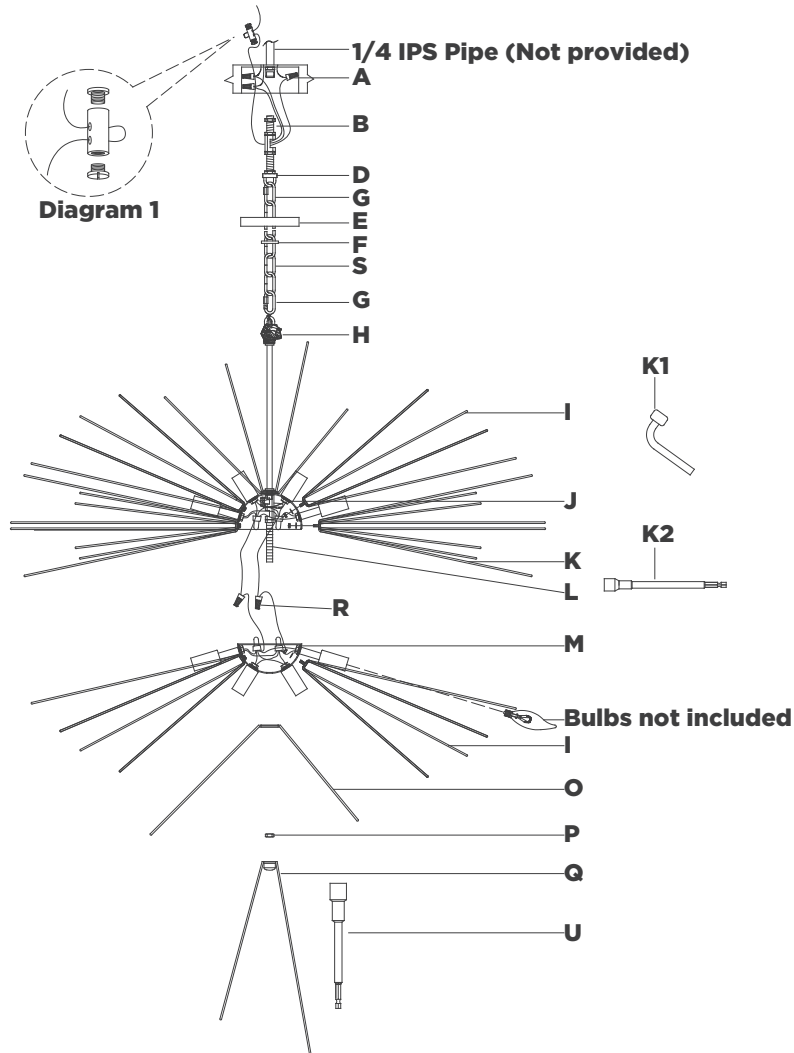

Strada Large Round Pendant


Item # KW5072

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

8. Connect black wire from the bottom half ball **(M)** to black wire from the top half ball **(J)** using wire nut **(R)**.
9. Connect white wire from the bottom half ball **(M)** to white wire from the top half ball **(J)** with the wire nut **(R)**.
10. Install bottom half ball **(M)** to threaded tube **(L)** and secure with branch **(O)** and hex nut **(P)** using provided wrench **(U)**.
11. Thread branch **(Q)** to the bottom of threaded tube **(L)**.
12. Install light bulbs into the sockets.
13. Determine desired overall length, and amount of chain **(S)** needed. Shorten chain using chain pliers. (Keep extra chain)
14. Attach chain **(S)** to collar loop **(D)** and to fixture loop **(H)** using quick links **(G)**. Secure quick links **(G)**.
15. Thread fixture wire, ground wire and safety cable through chain **(S)**.
NOTE: When you reach the collar loop **(D)**, ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box. Do not cut safety cable.
16. Separate two sides of molded wire, and strip insulation on each 5/8".
17. Loosen collar ring **(F)** and let canopy **(E)** slip down chain **(S)** carefully.

ASSEMBLY INSTRUCTIONS

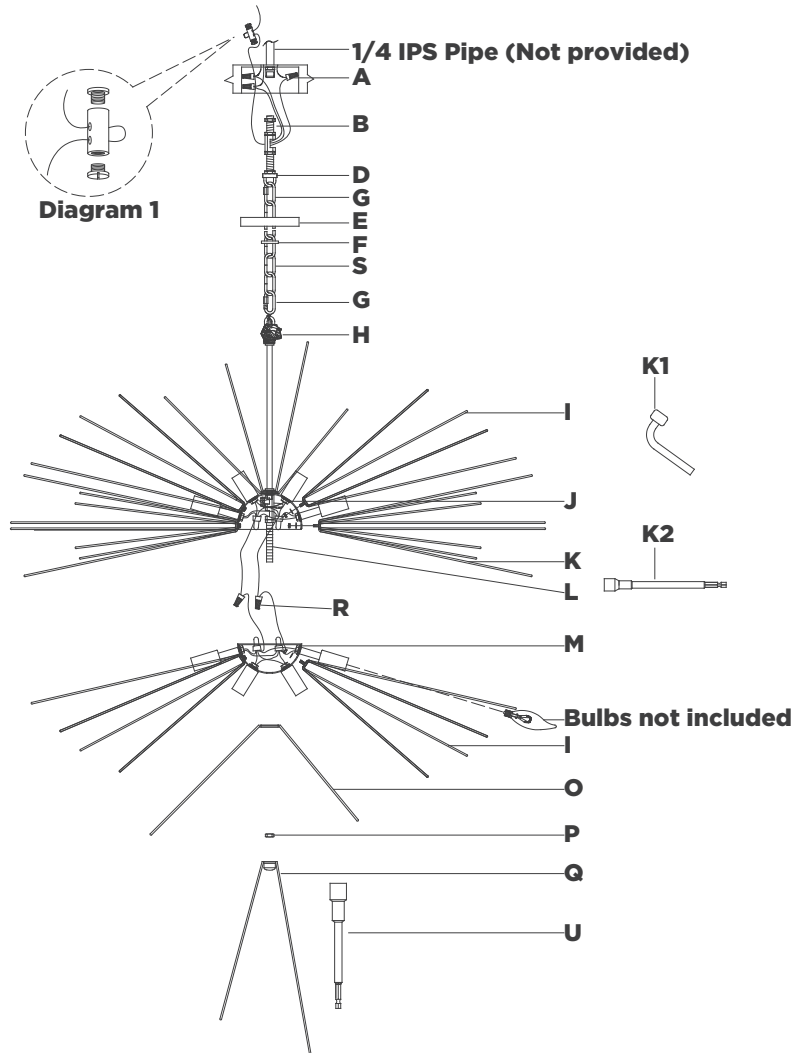

Strada Large Round Pendant

Item # KW5072

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

18. Twist all fixture wires together, and slip through center hole of collar loop **(D)**.

NOTE: Untwist wires and separate to prepare for connection.

19. Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (See diagram 1).

20. Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut **(A)**.

NOTE: It is imperative that the fixture is grounded.

21. Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut **(A)**.
22. Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

23. Make sure all wire connections are tight, then carefully tuck into the junction box.
24. Install canopy **(E)** to collar loop **(D)** and secure with collar ring **(F)**.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

ASSEMBLY INSTRUCTIONS

Strada Large Round Pendant


Item # KW5072

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

For a more personalized style you are able to gently bend spines in any direction.

NOTICE: BENDING SPINES MULTIPLE TIMES CAN CAUSE THEM TO BREAK

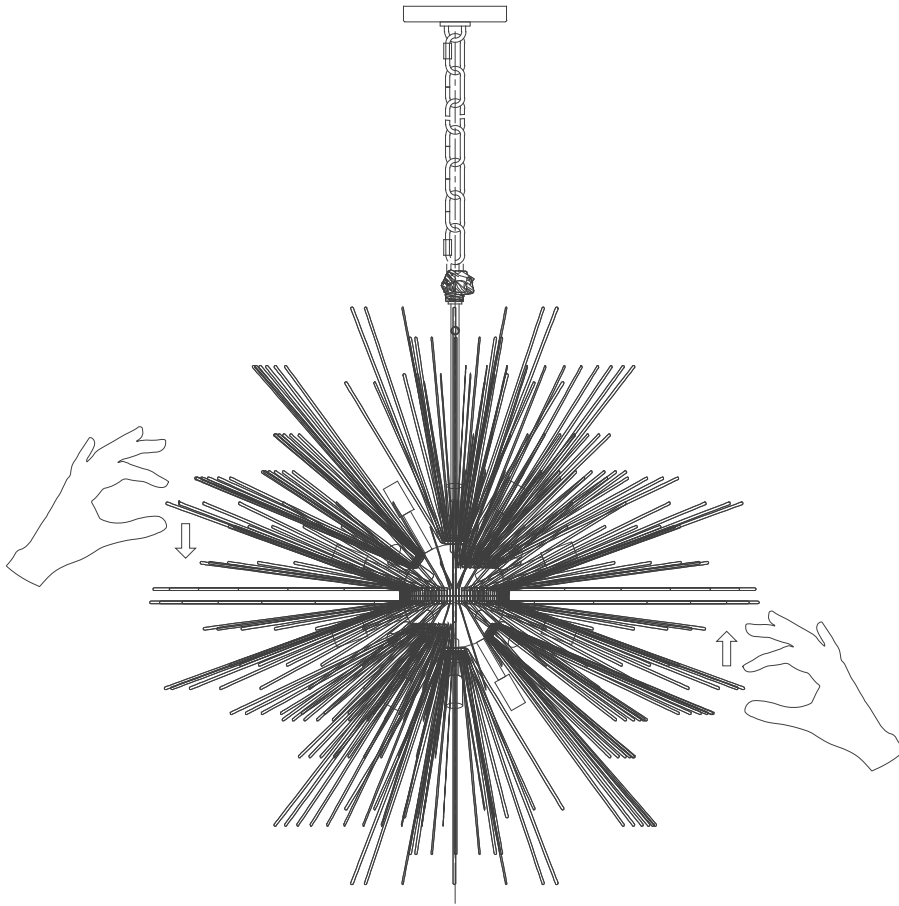

VISUAL COMFORT & CO.

