

Hilo Outdoor Chandelier

OLF3295/9, OLF3296/121.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

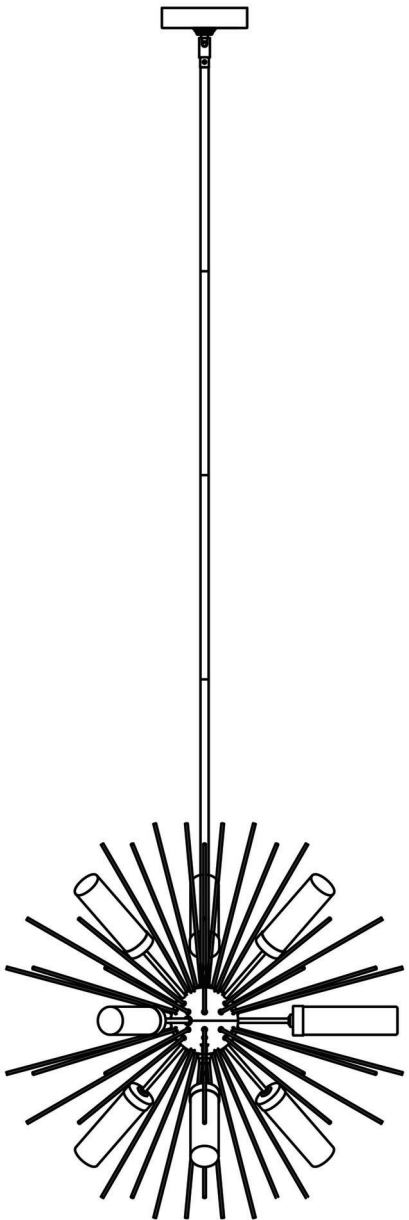

Install the Fixture

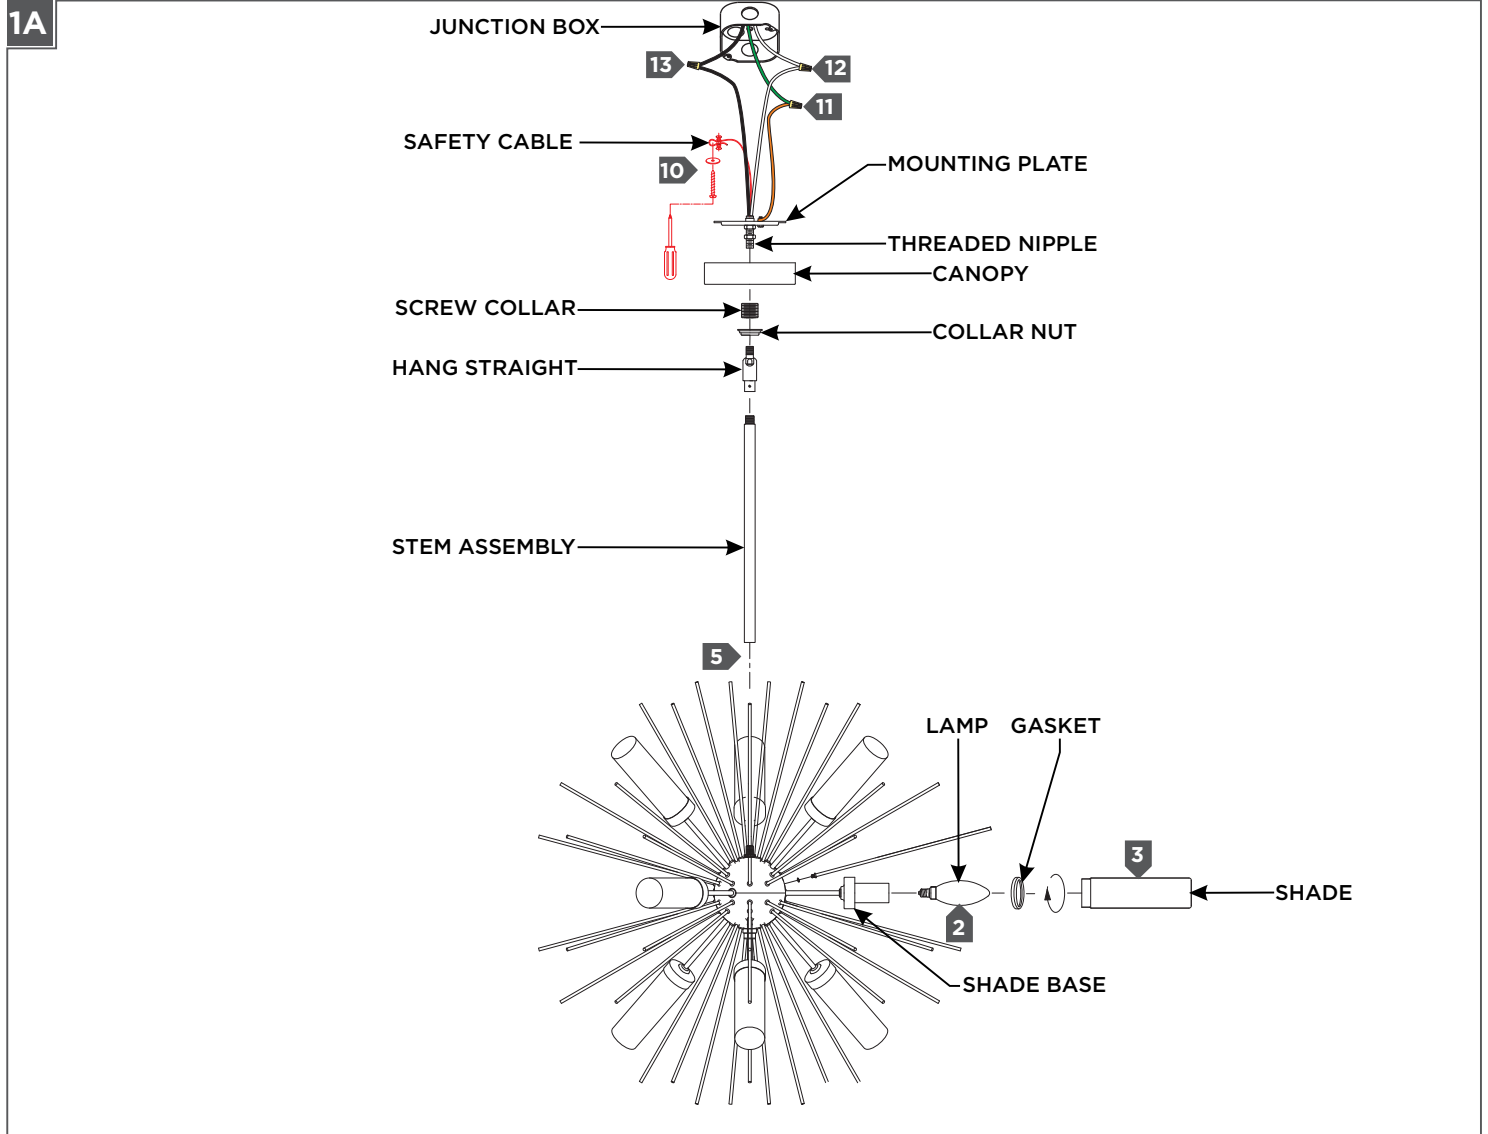

- 1** If necessary, screw the short end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
- 2** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 3** Install the gasket over the socket and onto the shade base, then install the shade by screwing it into the shade base. Repeat for remaining shades.
- 4** Determine the wanted height or look of the fixture with the provided stems and hang straight, then assemble them by screwing them together. **NOTE: For outdoor applications, please apply Loctite to threads of stems at installation to reduce risk of wind rotating fixture.**
- 5** Feed the fixture wires and safety cable through the stem assembly, then screw the stem assembly onto the fixture.
- 6** Unscrew the collar nut off the screw collar and place it onto the stem followed by the canopy.
- 7** Feed the fixture wires and safety cable through the threaded nipple, then screw the mounting plate assembly to the stem assembly.
- 8** Weave the cord and safety cable through the collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 9** Secure the mounting plate to the junction box.
- 10** Install the safety cable in accordance to local building codes.
- 11** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 12** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 13** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 14** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the screw collar.