Helios Wall

Visual Comfort & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes. This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

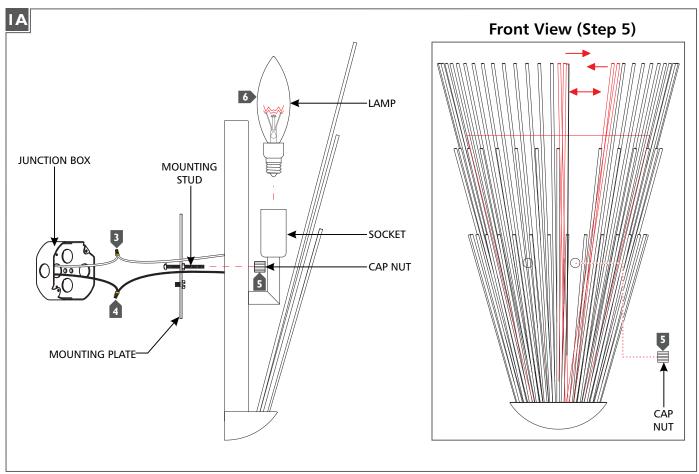

- Secure the mounting plate to the junction box.
- Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- Properly place all wires and wire nut connections into the junction box/fixture base:
 - A) Mount the fixture base onto the mounting studs.
 - B) Using two fingers, carefully spread aside two or three rods creating just enough space to fasten one cap nut at a time. Repeat for remaining cap nut.
 - C) If necessary, adjust the rods back to their position by slightly bending them back as shown by arrows.
- 6 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.

SAVETHESE INSTRUCTIONS!